




City of Hampton

## Before Demolition:

Before a structure is demolished, the existing sanitary sewer lateral shall be capped at the existing cleanout location. The cap shall be installed to the rear of the existing wye connection on the “private” side of the property line. Once a cap is installed, the contractor or owner shall notify the City of Hampton’s customer call center (727-8311) of completion prior to commencement of demolition.

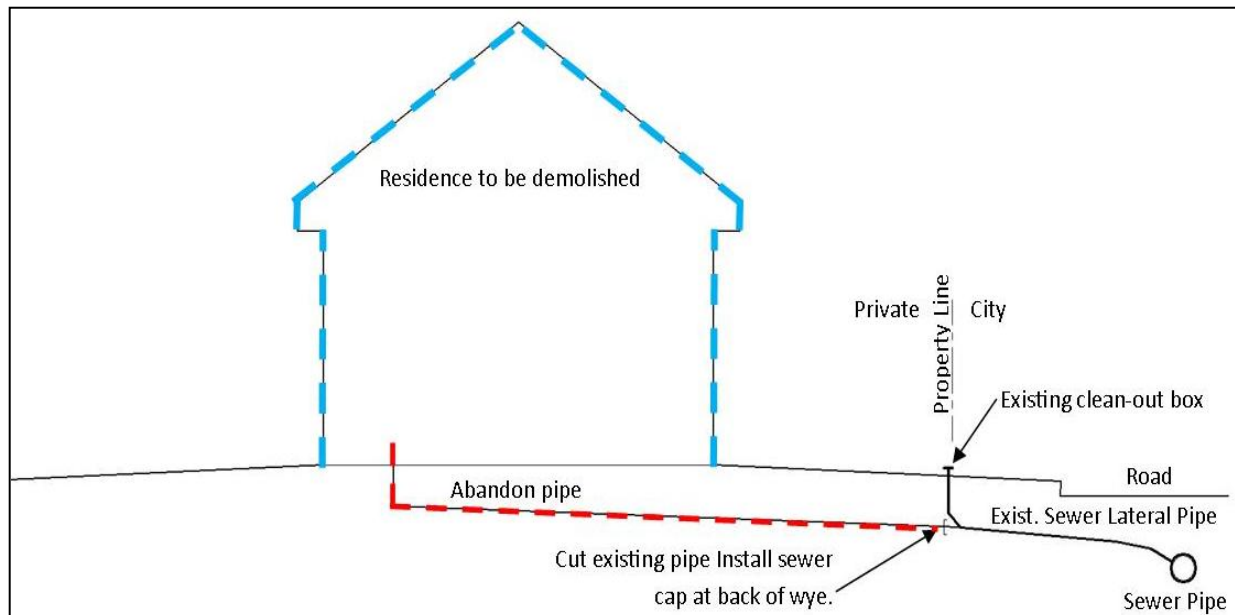

Upon notification from the City’s Development Services Center, a technician from Wastewater Operations will verify that the sanitary sewer service lateral has been properly capped prior to commencement of demolition.

### EXAMPLES OF APPROVED CAP METHODS:

For questions, please contact Wastewater Operations **727-8410**



### DEPARTMENT OF PUBLIC WORKS

22 Lincoln Street, 4<sup>th</sup> Floor  
Hampton, VA 23669

*“Oldest Continuous English Speaking Settlement in America – 1610”*